

Single Head Pre-requisites checklist

Installation
address
and contact:

Requirements needed for successful installation of the Coloreel unit	Estimated installation date:
Installation type: <i>See sketch at page 2</i> Standard stand Stand w. Long beams Stand w. Long beams and Adapter plate	
Embroidery machine: <i>Brand and model</i> _____	
Space required: <ul style="list-style-type: none">○ Min 120 x 120 cm width and depth. Ceiling height minimum 265 cm○ Max distance from the right side of the embroidery machine to the point on tension board where the Coloreel thread is to enter the thread path is 65 cm.<ul style="list-style-type: none">▪ Should the distance be more than 65 cm, long beams (option) can be used up to 115 cm▪ Note that the stand must be secured to the floor when using the long beams○ Adaptor plate can be used to position the stand from the backside of the embroidery machine.	
Floor material information: _____ <i>(When Long beams are to be used, the stand needs to be secured to the floor! Floor material is needed to choose the correct securing method)</i>	
Wired network connection <ul style="list-style-type: none">○ Network access with cable connection using DHCP, dynamic Ip-address activated.<ul style="list-style-type: none">▪ Cable connection within 100 cm from backside of stand.▪ <i>Static Ip-address is possible, refer to customer's LAN operator for configuration.</i>▪ Recommended internet connection speed should be minimum ~2 MB/sec<ul style="list-style-type: none">• <i>Internet connection is not mandatory, but highly recommended</i>	
PC running Windows 8 or later , with Chrome, Firefox or Microsoft Edge browser <ul style="list-style-type: none">▪ Connected to the same LAN as the ITCU	
Power supply. Power supply. AC 100-240V ~ 5.5A 50/60Hz, rated 600W (per unit).	
Step ladder , at least 100 cm in height.	
Temperature / Humidity operation ranges <i>Limitations always apply. Should they be out of range, the Coloreel unit will not be able to run</i> Operating temperature: 18° to 28° C Operating humidity: 30% - 85% RH, no condensation allowed.	
Additional notes:	

If you have any questions, please contact your sales representative.

Date

Coloreel

COLOREEL®


Gjuterigatan 9

553 18 Jönköping

Sweden


www.coloreel.com

Sketch of standard stand, and standard stand with Long beams (option)

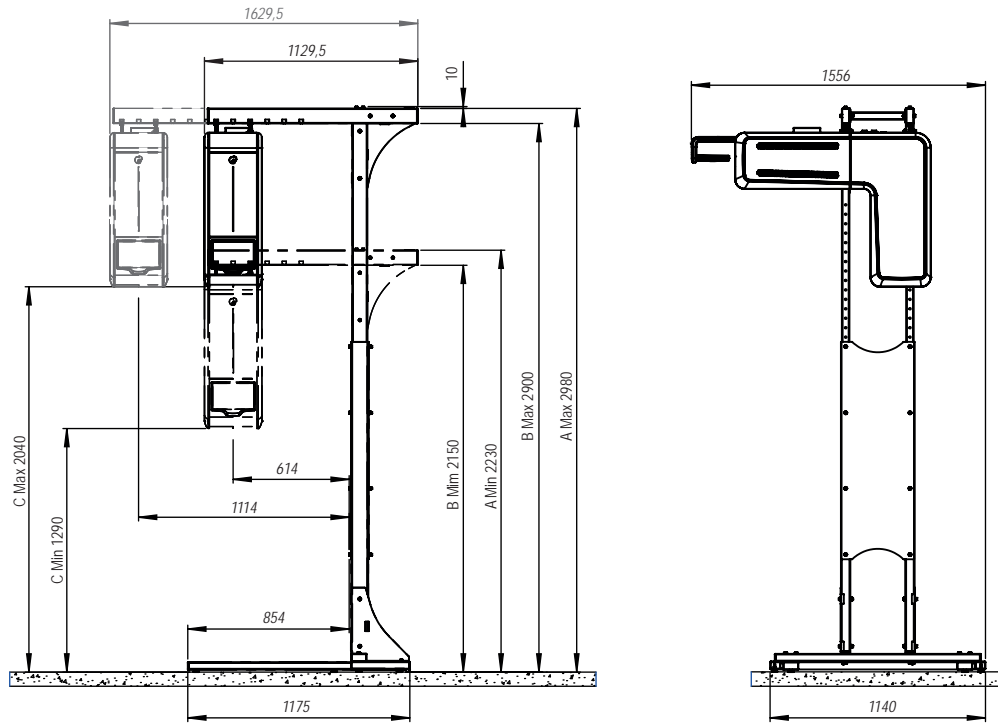

Note that the use of Long beams requires the stand to be secured to the floor. Dimension of bolt: M8. Use a large washer. Type of bolt will depend on the floor material!

Sketch of stand with Adaptor plate (option together with Long beams), allows for the stand to be positioned at the backside of the embroidery machine.

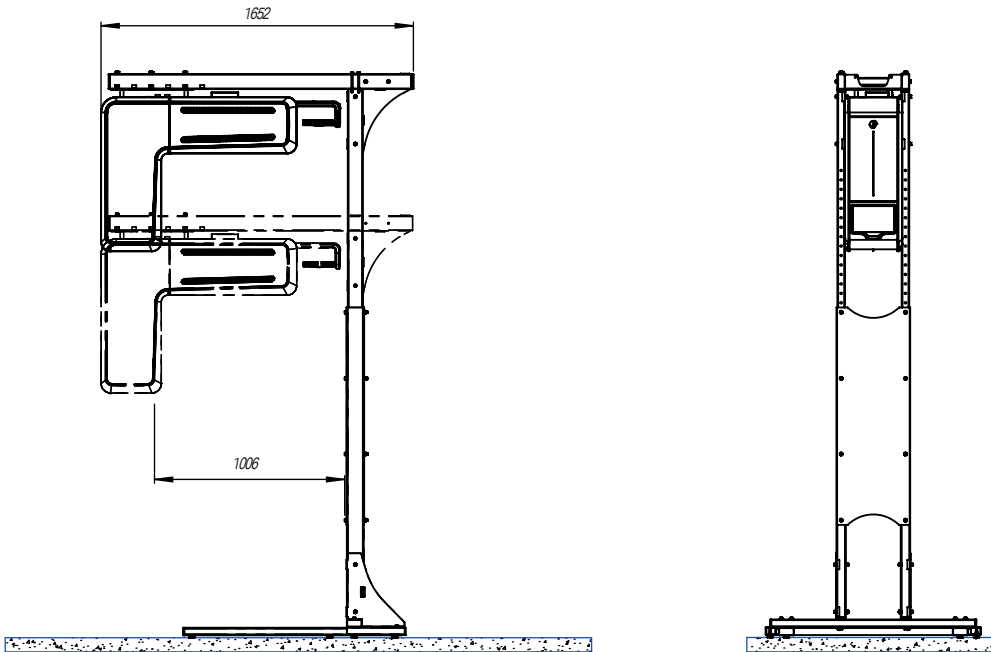

COLOREEL®

Coloreel

Gjuterigatan 9

553 18 Jönköping

Sweden

www.coloreel.com