

COLOREEL®


Product Specification - Coloreel ITC Unit



Coloreel ITCU Technical Data

Dimensions and weight

Picture ref.	Millimeters	Inches
A	1265	49.8
B	1034	40.7
C	230	9.1
D	716	28.2
E	844	33.2
F	518	20.4
G	305	12
H	318	12.5
Weight	Kg	Lbs
Coloreel Unit	<64	<141

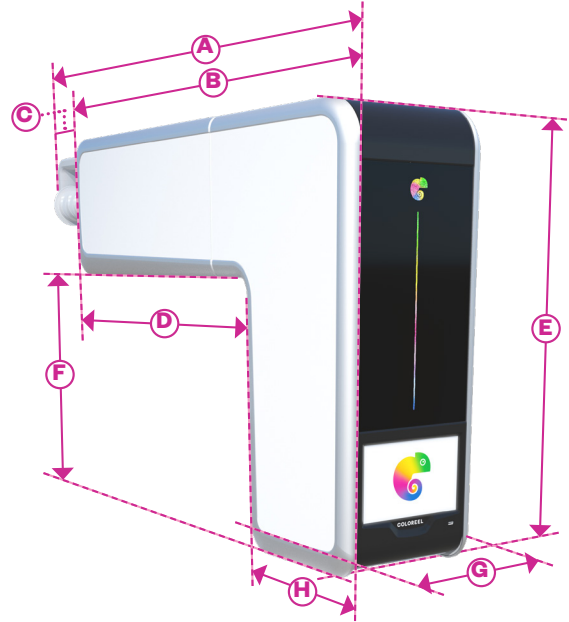

Installation

Power supply*	AC 100-240V ~ 5.5A 50/60Hz, rated 600W
LAN/WAN Connection	Wired network with a minimum of 2Mb/s internet connection
Stitch counter	Optical stitch sensor included, connected to embroidery machine
Configuration	Single head/Multi-head stand for up to 8 units

Operation

Maximum thread coloring speed	200 mm/s	7.9 inch/s
Operation temperature**	18-28 °C	64-82 °F
Operation Humidity (RH)**	30 - 80 %	

* No voltage peaks above 286V

** The ITCU will not be operational outside these limits

The Coloreel ITCU is for indoor use only and shall be protected from excessive levels of dust.

COLOREEL®